


PCB Mating (Ref)

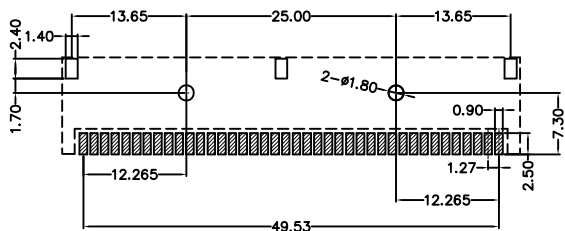

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
 DEFAULT TOLERANCES: ±0.05; PCB THICKNESS: 1.6MM
 TOP VIEW

NOTES:

Current Rating:1.0AMP
 Withstand Voltage:250V AC/DC
 Contact Resistance:0.03mΩ Max
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-55°C to +85°C

Contact Material:Brass
 Contact Plating:Au or Sn over Ni
 Insulator Material:LCP+30%GF(UL94V-0)

How to Order:

91911Z-XXX XX B1A1

No. of pins
40

Contact plating
 S0:Gold Flash/Tin
 S1:3U"Gold/Tin
 S2:5U"Gold/Tin
 S3:10U"Gold/Tin
 S4:15U"Gold/Tin
 S6:30U"Gold/Tin

HSL 东莞市华视连电子有限公司
 Dong Guan Huslian Electronic Co., Ltd
 Email:sales@huslian.com www:huslian.com

| | | | | | | | | | |
|-----|------------|-------------------------|------|---------|----------|-------------------------------------------------|------|------|-------|
| | | | | | | UNLESS OTHKRWISE SPECIFIED DIMENSTONS ARE IN mm | | | |
| A0 | 2016/12/22 | NEW | Jack | Lee | JK Wu | SCALE | UNIT | SIZE | SHEET |
| REV | DATE | MODIFICATION DESCRIPTIO | DRAW | CHECKED | APPROVED | 1:1 | MM | A4 | 1/1 |

| | | | |
|-----------|-----------|----------|--------------------------------|
| DIMRNSTON | TOLERANCE | TITLE: | 91911Z-XXXXXB1A1 |
| .XXX | ± 0.20 | PART NO. | 1.27mm Card Edge 40Pin R/A SMT |
| .XX | ± 0.25 | DWG. NO. | |
| X.X | ± 0.40 | | |
| ANGULAR | ± 3° | | |
| UNIT | mm | | |